5/21/2021 2:28:01 PM

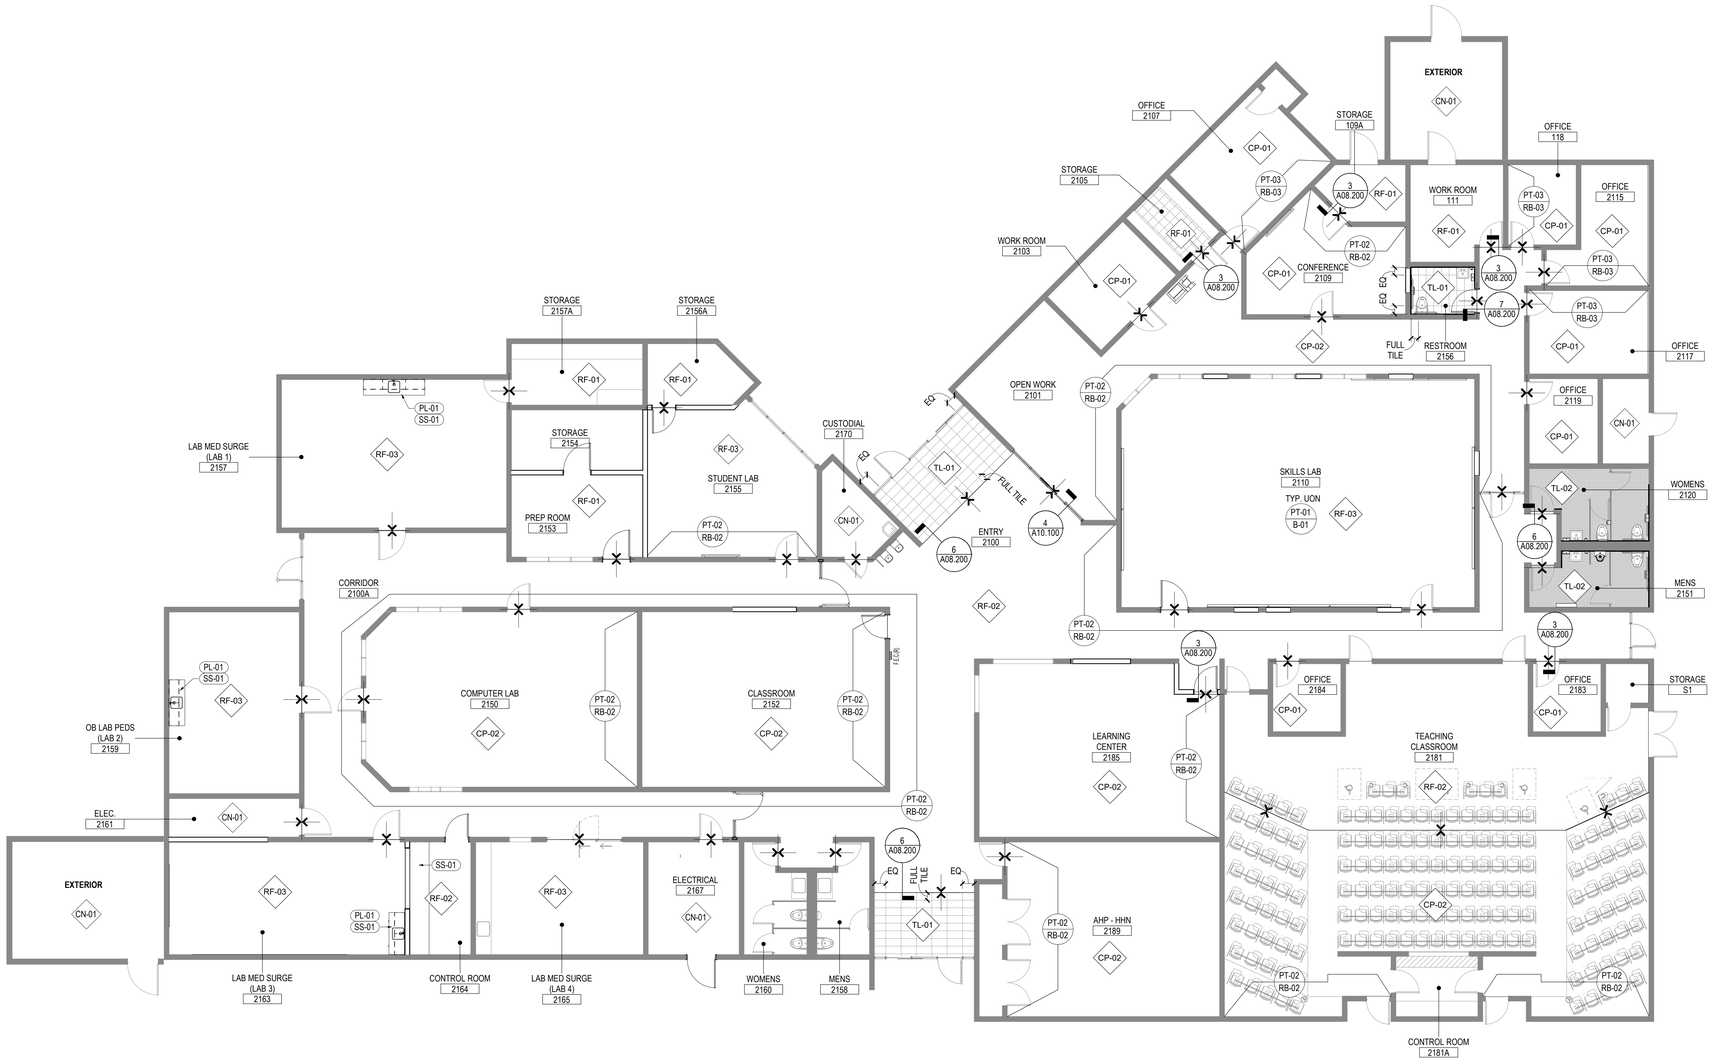

1 FINISH PLAN
SCALE: 1/8" = 1'-0"

FINISH SCHEDULE

CP-01
DESCRIPTION: CARPET TILE
MANUFACTURER: SHAW OR APPROVED EQUAL
STYLE/PATTERN: FLAT WEAVE OR APPROVED EQUAL
COLOR: BLENDED OR APPROVED EQUAL
SIZE: 9"X36"
INSTALLATION: ASHLAR

CP-02
DESCRIPTION: CARPET TILE
MANUFACTURER: SHAW OR APPROVED EQUAL
STYLE/PATTERN: FLAT WEAVE OR APPROVED EQUAL
COLOR: BLENDED SKY OR APPROVED EQUAL
SIZE: 9" X 36"
INSTALLATION: ASHLAR

CN-01
DESCRIPTION: EXPOSED CONCRETE

RF-01
DESCRIPTION: RESILIENT FLOORING
MANUFACTURER: ARMSTRONG OR APPROVED EQUAL
STYLE/PATTERN: STRIATIONS OR APPROVED EQUAL
COLOR: STEEL T3602 OR APPROVED EQUAL
SIZE: 12" X 24"

RF-02
DESCRIPTION: RESILIENT FLOORING
MANUFACTURER: SHAW OR APPROVED EQUAL
STYLE/PATTERN: ABIDE OR APPROVED EQUAL
COLOR: TAHINI OAK OR APPROVED EQUAL
SIZE: 7" X 48"

RF-03
DESCRIPTION: RESILIENT FLOORING
MANUFACTURER: SHAW OR APPROVED EQUAL
STYLE/PATTERN: TERRACE OR APPROVED EQUAL
COLOR: HERON OR APPROVED EQUAL
SIZE: 12" X 24"

TL-01
DESCRIPTION: PORCELAIN TILE (FLOOR)
MANUFACTURER: VERSATILE OR APPROVED EQUAL
STYLE/PATTERN: GLOCAL OR APPROVED EQUAL
COLOR: SUGAR OR APPROVED EQUAL
SIZE: 12" x 24"
INSTALLATION: STACKED

TL-02
DESCRIPTION: EXISTING TILE TO REMAIN

TL-03
DESCRIPTION: PORCELAIN TILE (WALL)
MANUFACTURER: VERSATILE OR APPROVED EQUAL
STYLE/PATTERN: GLOCAL OR APPROVED EQUAL
COLOR: TBD
SIZE: 12" x 24"
INSTALLATION: STACKED

PT-01
DESCRIPTION:PAINT - GENERAL
MANUFACTURER:SHERWIN WILLIAMS OR APPROVED EQUAL
COLOR:NEW WHITE OR APPROVED EQUAL

PT-02
DESCRIPTION:PAINT - ACCENT
MANUFACTURER:SHERWIN WILLIAMS OR APPROVED EQUAL
COLOR:FIRST STAR OR APPROVED EQUAL

PT-03
DESCRIPTION:PAINT - ACCENT
MANUFACTURER:SHERWIN WILLIAMS OR APPROVED EQUAL
COLOR:HAZEL OR APPROVED EQUAL

RB-01
DESCRIPTION:BASE - RESILIENT
MANUFACTURER:JOHNSONITE OR APPROVED EQUAL
STYLE/PATTERN:ROLLED TYPE GOODS.
COLOR:TBD
REMARKS:4" HEIGHT

RB-02
DESCRIPTION:BASE - RESILIENT
MANUFACTURER:JOHNSONITE OR APPROVED EQUAL
STYLE/PATTERN:ROLLED TYPE GOODS.
COLOR:TBD
REMARKS:4" HEIGHT

RB-03
DESCRIPTION:BASE - RESILIENT
MANUFACTURER:JOHNSONITE OR APPROVED EQUAL
STYLE/PATTERN:ROLLED TYPE GOODS.
COLOR:TBD
REMARKS:4" HEIGHT

PL-01
DESCRIPTION: PLASTIC LAMINATE
MANUFACTURER: FORMICA OR APPROVED EQUAL
COLOR: LANDMARK WOOD OR APPROVED EQUAL
FINISH: MATTE

SS-01
DESCRIPTION: SOLID SURFACE
MANUFACTURER: CEASERSTONE OR APPROVED EQUAL
COLOR: INTENSE WHITE 6011 OR APPROVED EQUAL
SIZE: 30 MM
FINISH: MATTE

SHEET NOTES

GENERAL NOTES

A REFER TO A00 SERIES SHEETS FOR GENERAL NOTES, ABBREVIATIONS, SYMBOLS, ADA REQUIREMENTS, CLEARANCES, MOUNTING HEIGHTS, ETC.

B ALL PAINT FINISH LOCATIONS TO BE THREE COAT SYSTEMS. (1) COAT PRIMER, (2) COATS FINISH.

C FLOAT WOOD AND RESILIENT FLOORS LEVEL TO WITHIN 1/4" IN 10'. PROVIDE SURVEY OF FLOOR ELEVATIONS TO ARCHITECT PRIOR TO COMMENCEMENT OF WORK.

D WALL BASE TO BE 2-1/2" HIGH ROLLED GOODS IN MAXIMUM LENGTHS. PROVIDE STRAIGHT BASE AT CARPET, COVE BASE AT VCT, BASE WRAP AROUND CORNERS. COORDINATE WITH ARCHITECT FOR CORRECT INSTALLATION METHOD.

E WHERE FLOOR MT OUTLETS ARE SPEC'D IN CARPETED AREA, CUT CARPET IN AN "X" OVER THE HOLE AND CARPET ACROSS TO ALLOW CARPET PATCHING IF OUTLETS ARE LATER CAPPED. DO NOT TRIM CARPET.

F FLOOR COVERING IN CLOSETS SHALL BE THE SAME AS THAT OF THE SPACE ONTO WHICH THE CLOSET DOOR OPENS, UNO.

G FLOAT ALL AREAS WHERE FLOOR IS NOT LEVEL OR TRUE PRIOR TO FLOORING INSTALLATIONS.

H PRIOR TO SETTING TILE, CAULK AROUND ALL PIPES AND OTHER ELEMENTS PENETRATING SURFACE TO BE TILED USING SILICONE TYPE SEALANT. COMPLY WITH TCA INSTALLATION METHODS.

J U.N.O. PROVIDE PT-01 & RB-01 THROUGHOUT

IDENTIFICATION STAMP
DIV. OF THE STATE ARCHITECT
APP. 04-120034 INC:
REVIEWED FOR
SS ☑ FLS ☑ ACS ☑
DATE: 06/09/2021

IMPERIAL VALLEY COLLEGE

SCHOOL OF NURSING
380 E ATEN ROAD
IMPERIAL, CA 92251

Gensler
225 Broadway
Suite 100
San Diego, CA 92101
United States
Tel 619.557.2500
Fax 619.557.2520

△	Date	Description	
	02.05.2021	SCHEMATIC DESIGN	AK | SS
	03.05.2021	DESIGN DEVELOPMENT	AK | SS
	04.15.2021	DSA SUBMITTAL	AK | VK | SS
	05.25.2021	DSA BACKCHECK	AK | SS

LICENSED ARCHITECT
THOMAS P. HEFFERNAN
REN. 6/30/21
STATE OF CALIFORNIA

Seal/Signature

Project Name
IVC - SCHOOL OF NURSING

Project Number
055.7853.000

Description
LEVEL 01
FINISH PLAN - LEVEL 01

Scale
1/8" = 1'-0"

A02.701

© 2019 Gensler

\\gensler.ad\projects\Revit\bsellhodel\236727\VC_School of Nursing_R19_Aaron_Kroll.rvt