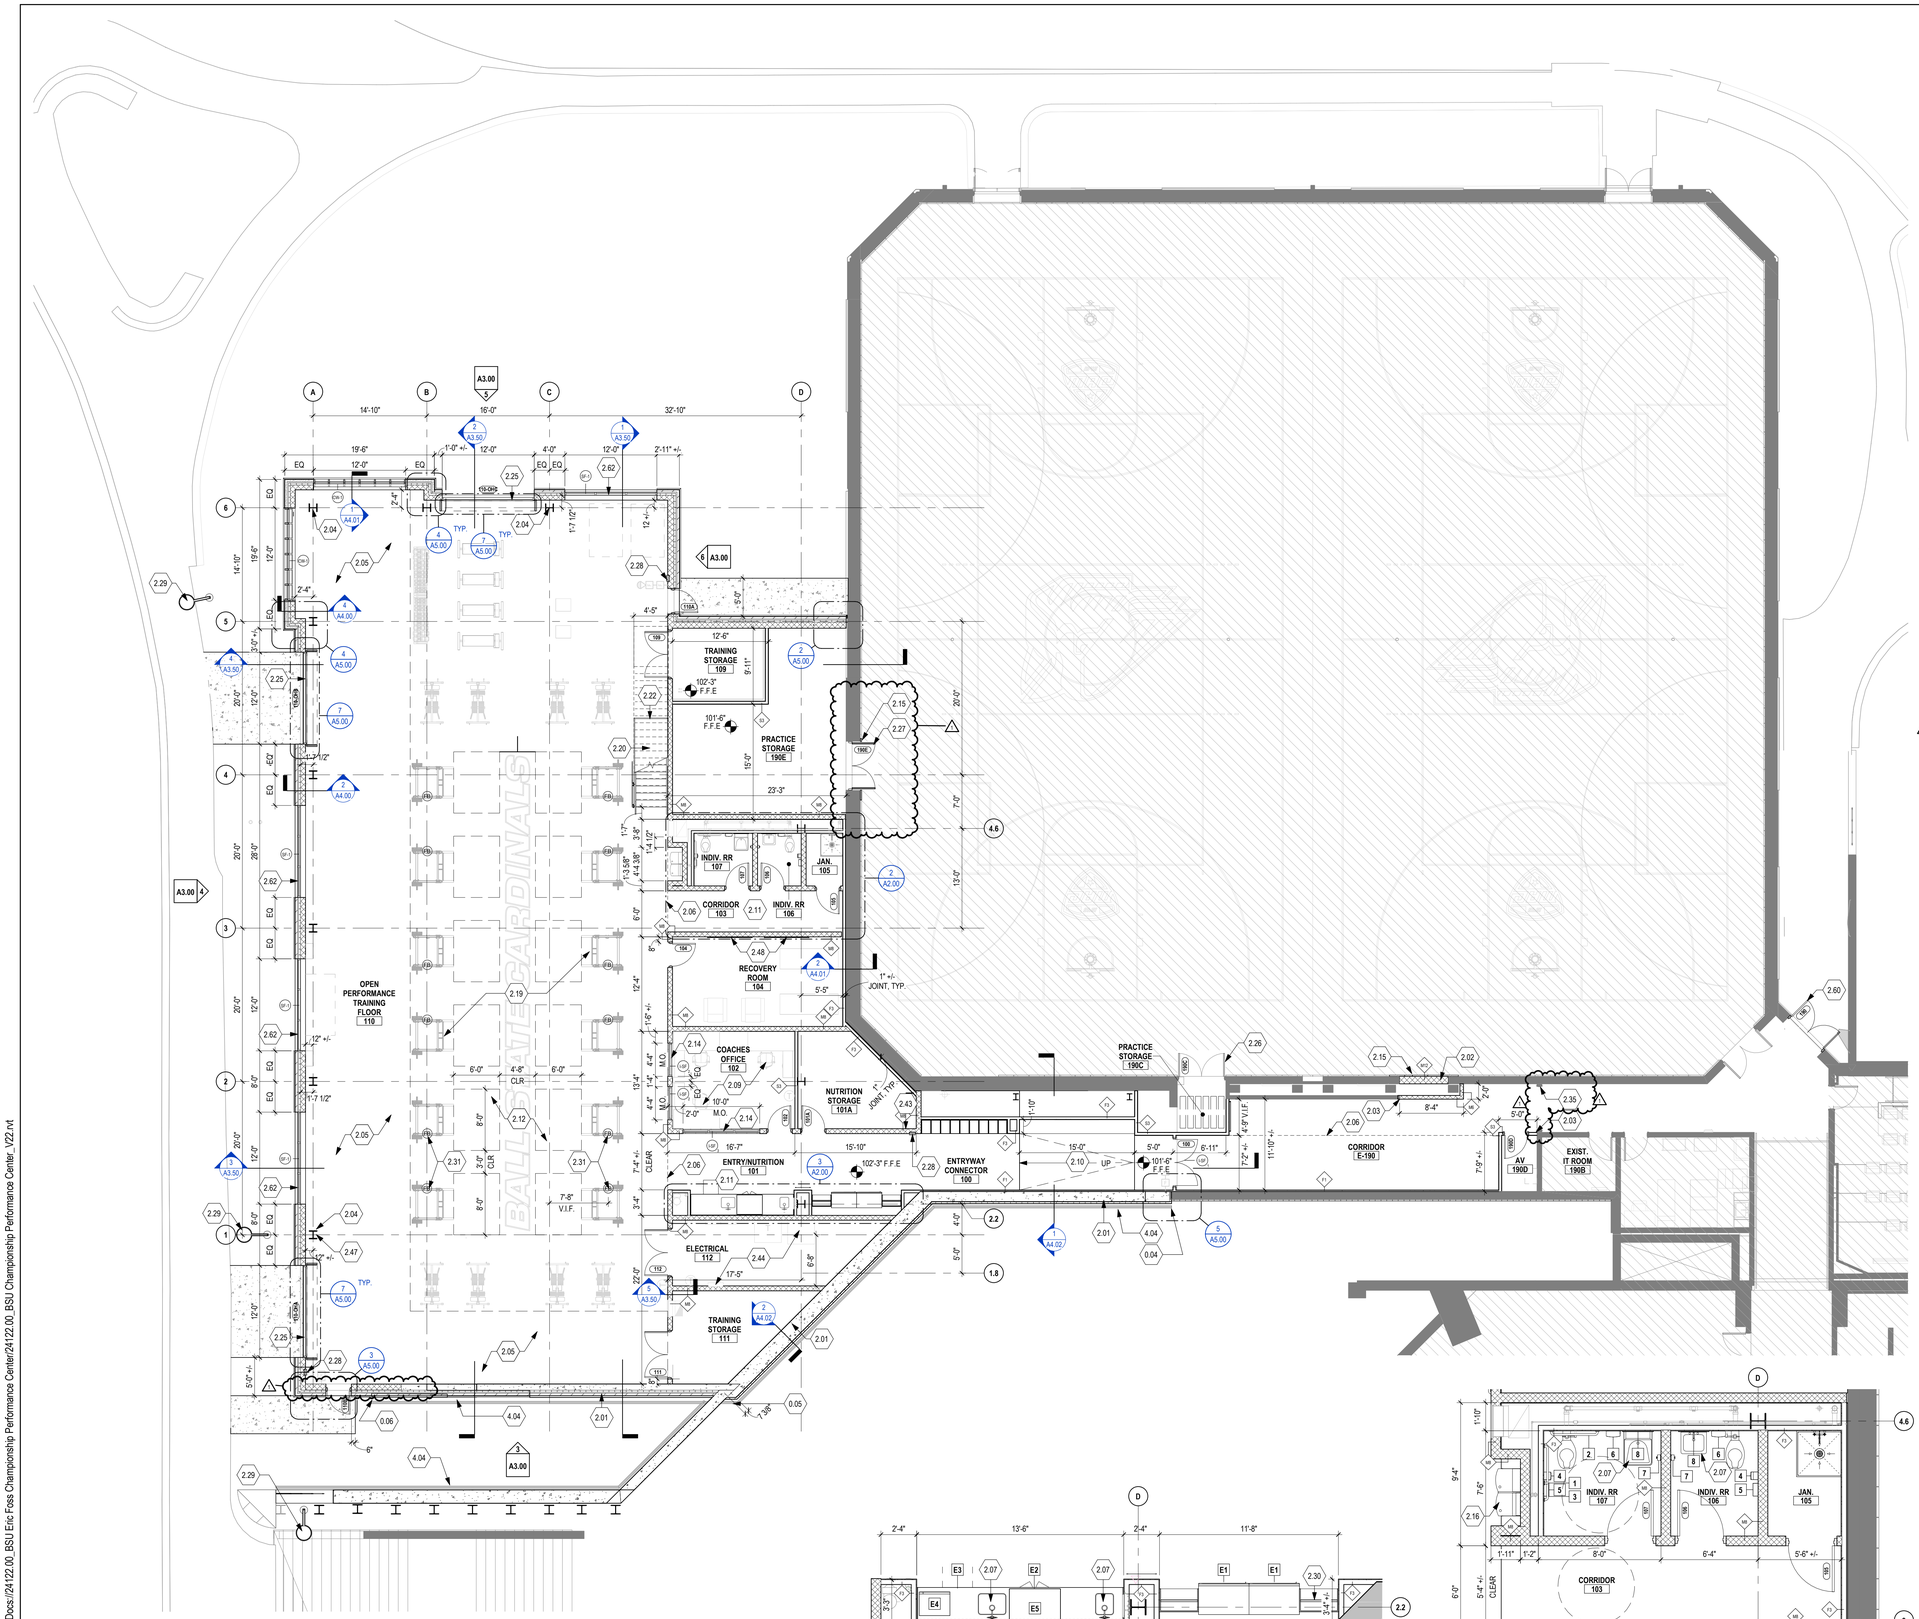

1 A2.00 CHAMPIONSHIP PERFORMANCE CENTER - COURT LEVEL CONSTRUCTION PLAN
1/8" = 1'-0"

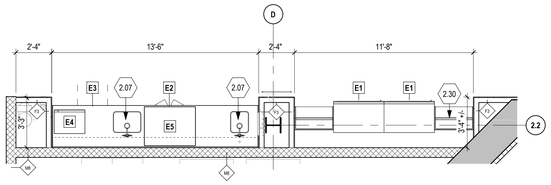

3 A2.00 ENLARGED PLAN - NUTRITION STATION
1/4" = 1'-0"

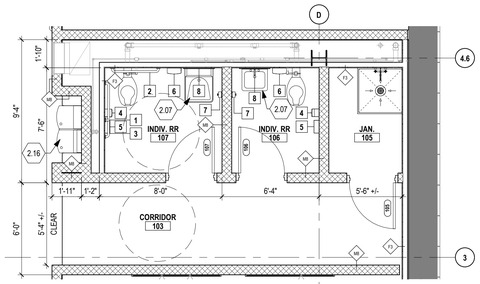

2 A2.00 ENLARGED PLAN - RESTROOM CORE
1/4" = 1'-0"

GENERAL CONSTRUCTION NOTES

A. ALL DIMENSIONS THAT ARE +/- OR ± (PLUS OR MINUS) ARE TO BE DETERMINED EXACTLY BY FIELD MEASUREMENT.
B. ALL DIMENSIONS AND EXISTING CONDITIONS SHALL BE VERIFIED IN THE FIELD BEFORE PROCEEDING WITH THE WORK. ARCHITECT SHALL BE NOTIFIED OF ANY DISCREPANCIES.
C. ALL DIMENSIONS HAVE PREFERENCE OVER SCALE, DO NOT SCALE DRAWINGS.
D. LARGE SCALE DETAILS, GOVERN OVER SMALL SCALE DETAILS.
E. IF CONTRACTOR SHOULD DISCOVER ANY UNFORSEEN PROBLEMS DURING THE REMOVAL OF ANY EXISTING CONSTRUCTION OR THE CONSTRUCTION OF ANY NEW WORK, THE ARCHITECT SHOULD BE NOTIFIEY IMMEDIATELY AND THAT PARTICULAR WORK SHOULD BE DISCONTINUED UNTIL NECESSARY REVISIONS CAN BE DECIDED UPON.
F. ALL DOORS IN METAL STUD PARTITIONS TO BE LOCATED WITH OUTSIDE EDGE OF THE FRAME 4" FROM PERPENDICULAR WALL. ALL MASONRY OPENINGS CREATED FOR NEW DOORS TO BE LOCATED 8" FROM PERPENDICULAR WALL. TYPICAL UNLESS NOTED OTHERWISE.
G. ALL INTERIOR WALLS GO TO ROOF DECK, UNLESS NOTED OTHERWISE.
H. WHEN INFILLING AN OPENING WITHIN A MASONRY WALL, TOOTH-IN MASONRY TO MATCH EXISTING COURSING, UNLESS NOTED OTHERWISE.
I. ALL INTERIOR DIMENSIONS ARE TO FACE OF SHEATHING AND/OR FACE OF INTERIOR MASONRY, UNLESS NOTED OTHERWISE.
J. COORDINATE FINAL PARITION LOCATIONS WITH FURRING AT STRUCTURAL ELEMENTS.
K. COORDINATE INTERIOR CONCRETE SLAB ON GRADE CONTROL JOINT PATTERN AT ALL HARD-TILED SURFACE AREAS WITH ARCHITECT.
L. ALL EXTERIOR DIMENSIONS ARE TO FACE OF FOUNDATION, FACE OF EXTERIOR SHEATHING, AND/OR FACE OF EXTERIOR MASONRY.

KEYNOTES - CONSTRUCTION

0.05 PROVIDE SLEEVE THROUGH CONCRETE FOUNDATION WALL FOR FOOTING DRAIN. COORDINATE WITH DRAIN SIZE.
2.01 CAST-IN-PLACE CONCRETE FOUNDATION WALL. REFER TO STRUCTURAL DWGS.
2.02 INFILL WALL OPENING TO MATCH ADJACENT WALL TYPE. TOOTH IN CMU AS REQUIRED AND PAINT WALL TO MATCH ADJACENT WALL FINISH.
2.03 ALIGN NEW WALL WITH EXISTING WALL.
2.04 EXPOSED STEEL COLUMNS TO HAVE INTUMESCENT PAINT FINISH, TYP. REFER TO FIRE PROTECTION PLANS.
2.05 AREA OF INTERIOR TURF. REFER TO FINISH PLANS.
2.06 LINE OF SOFFIT ABOVE
2.07 SINK. REFER TO PLUMBING DRAWINGS.
2.09 NEW OFFICE DESK AND FURNITURE, BY OWNER. FURNITURE SHOWN FOR REFERENCE ONLY.
2.10 NEW CONCRETE RAMP AT 1:20 SLOPE, NO HANDRAILS REQUIRED. REFER TO STRUCTURAL DRAWINGS.
2.11 REFER TO ENLARGED PLANS FOR DIMENSIONS, WALL TYPES, AND KEYNOTES.
2.12 AREA OF WEIGHT LIFTING PLATFORMS. REFER TO FINISH PLANS
2.14 PREFINISHED ALUMINUM STOREFRONT SYSTEM WITH 1/4" TEMPERED GLAZING UNITS, CENTERED, TYP. REFER TO GLAZING ELEVATIONS.
2.15 REINSTALL SALVAGED GYMNASIUM PADDING AT WALL INFILL. ASSUME TO PROVIDE 3 NEW GYMNASIUM PADS TO MATCH EXISTING.
2.16 ADA BI-LEVEL DRINKING FOUNTAIN WITH BOTTLE FILLING STATION. REFER TO PLUMBING DRAWINGS.
2.19 WEIGHT TRAINING EQUIPMENT, BY OWNER. N.I.C. EQUIPMENT SHOWN FOR REFERENCE ONLY. COORDINATE ALL POWER AND DATA OUTLET LOCATIONS WITH EQUIPMENT VENDOR. BID/INSTALL PRIOR TO INSTALLATION.
2.20 METAL PAN STAIR WITH CONCRETE INFILL. B.O.D. VIVA RAILINGS STRUC SYSTEM WITH PMRO-1217 PATTERN, SIDE/FASCIA MOUNT.
2.22 UNDERSTAIR 8" HIGH SAFETY RAILING TO BE PAINTED TO MATCH STAIR SUPPORTS. REFER TO STAIR PLAN & DETAILS.
2.25 VERTICAL LIFT OVERHEAD GARAGE DOOR W/ GLASS PANELS. REFER TO DETAILS. B.O.D: OVERHEAD DOOR COMPANY.
2.26 EXIST. DOOR AND FRAME TO REMAIN. PROTECT DURING CONSTRUCTION.
2.27 RELOCATED EXIST. DOOR AND HARDWARE. REFER TO DOOR SCHEDULE.
2.28 SEMI-RECESSED FIRE EXTINGUISHER CABINET.
2.29 RELOCATED EXIST. LIGHTPOLES. REFER TO CIVIL AND ELECTRICAL DRAWINGS.
2.30 FUEL STATION MILLWORK. REFER TO FINISH PLAN, ELEVATIONS AND DETAILS.
2.31 POWER AND DATA FLOOR BOX. REFER TO ELECTRICAL DWGS. COORDINATE FINAL LOCATION WITH EQUIPMENT VENDOR PRIOR TO INSTALLATION.
2.35 PAINT EXISTING DOOR FRAME TO MATCH ADJACENT WALL FINISH/COLOR.
2.43 MILLWORK LOCKERS. REFER TO INTERIOR ELEVATIONS AND MILLWORK DETAILS.
2.44 ELECTRICAL EQUIPMENT. REFER TO ELECTRICAL DRAWINGS.
2.47 TOUCH SCREEN WALL MOUNTED TV BY OWNER ABOVE. PROVIDE POWER AND DATA. REFER TO ELECTRICAL & SYSTEMS PLANS.
2.48 LOCATION OF WALL MOUNTED TV BY OWNER, PROVIDE POWER AND DATA. REFER TO ELECTRICAL & SYSTEMS PLANS.
2.60 ADD ALT 03 - NEW ALUMINUM FRAMED GLASS DOOR WITH CARDREADER. REFER TO DOOR SCHEDULE
2.62 PREFINISHED EXTERIOR ALUMINUM STOREFRONT SYSTEM WITH 1/4" TEMPERED GLAZING UNITS, TYP. REFER TO GLAZING ELEVATIONS.

ACCESSORY SCHEDULE

MARK	DESCRIPTION	MANUFACTURER	MODEL	COMMENTS
1	18" GRAB BAR	BOBRICK	B-5806	
2	36" GRAB BAR	BOBRICK	B-5806	
3	42" GRAB BAR	BOBRICK	B-5806	
4	SRF. MOUNTED TOILET PAPER DISPENSER	BOBRICK	B-4288	BY OWNER
5	SANITARY NAPKIN DISPOSAL	BOBRICK	B-270	
6	SRF. MOUNTED PAPER TOWEL DISPENSER	BOBRICK	B-4262	BY OWNER
7	SRF. MOUNTED SOAP DISPENSER	BOBRICK	B-2111	BY OWNER
8	24"x36" MIRROR	BOBRICK	B-165 2436	

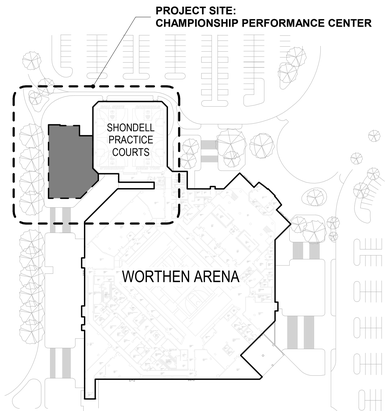

KEY PLAN - WORTHEN ATHLETIC COMPLEX
1" = 100'-0"

MSA SPORT
CINCINNATI | COLUMBUS | ORLANDO
msarch.com | 855.241.5666

WILLIAM SW BAKER
REGISTERED
No. AR11800078
INDIANA
ARCHITECT

WILLIAM SW BAKER
AR11800078
EXP. DATE: 12/31/2025

ERIC FOSS CHAMPIONSHIP PERFORMANCE CENTER

BALL STATE UNIVERSITY
WORTHEN ARENA
2800 W BETHEL AVE, MUNCIE, IN 47304
BALL STATE PROJECT NUMBER: 2024-016.01 WR

This drawing and the design concepts represented, as instruments of service, are the sole property of MSA DESIGN, and may not be used, reproduced, or copied in whole or part, for any purpose without the written authorization of MSA DESIGN.
Copyright MSA DESIGN.
MSA DESIGN: All Rights Reserved.
MSA SPORT is a division of **MSA** DESIGN

NO.	DATE	ISSUED / REVISION
	08/02/2024	100% SD
	09/27/2024	100% DD
	11/22/2024	95% CD
	01/10/2025	BID & PERMIT SET
1	01/31/2025	ADDENDUM 02

PROJECT NO. 24122.00

DRAWING TITLE:
COURT LEVEL CONSTRUCTION PLAN

A2.00

1/31/2025 10:57:45 AM Autodesk Docs://24122.00_BSU Eric Foss Championship Performance Center/24122.00_BSU Championship Performance Center_V22.rvt