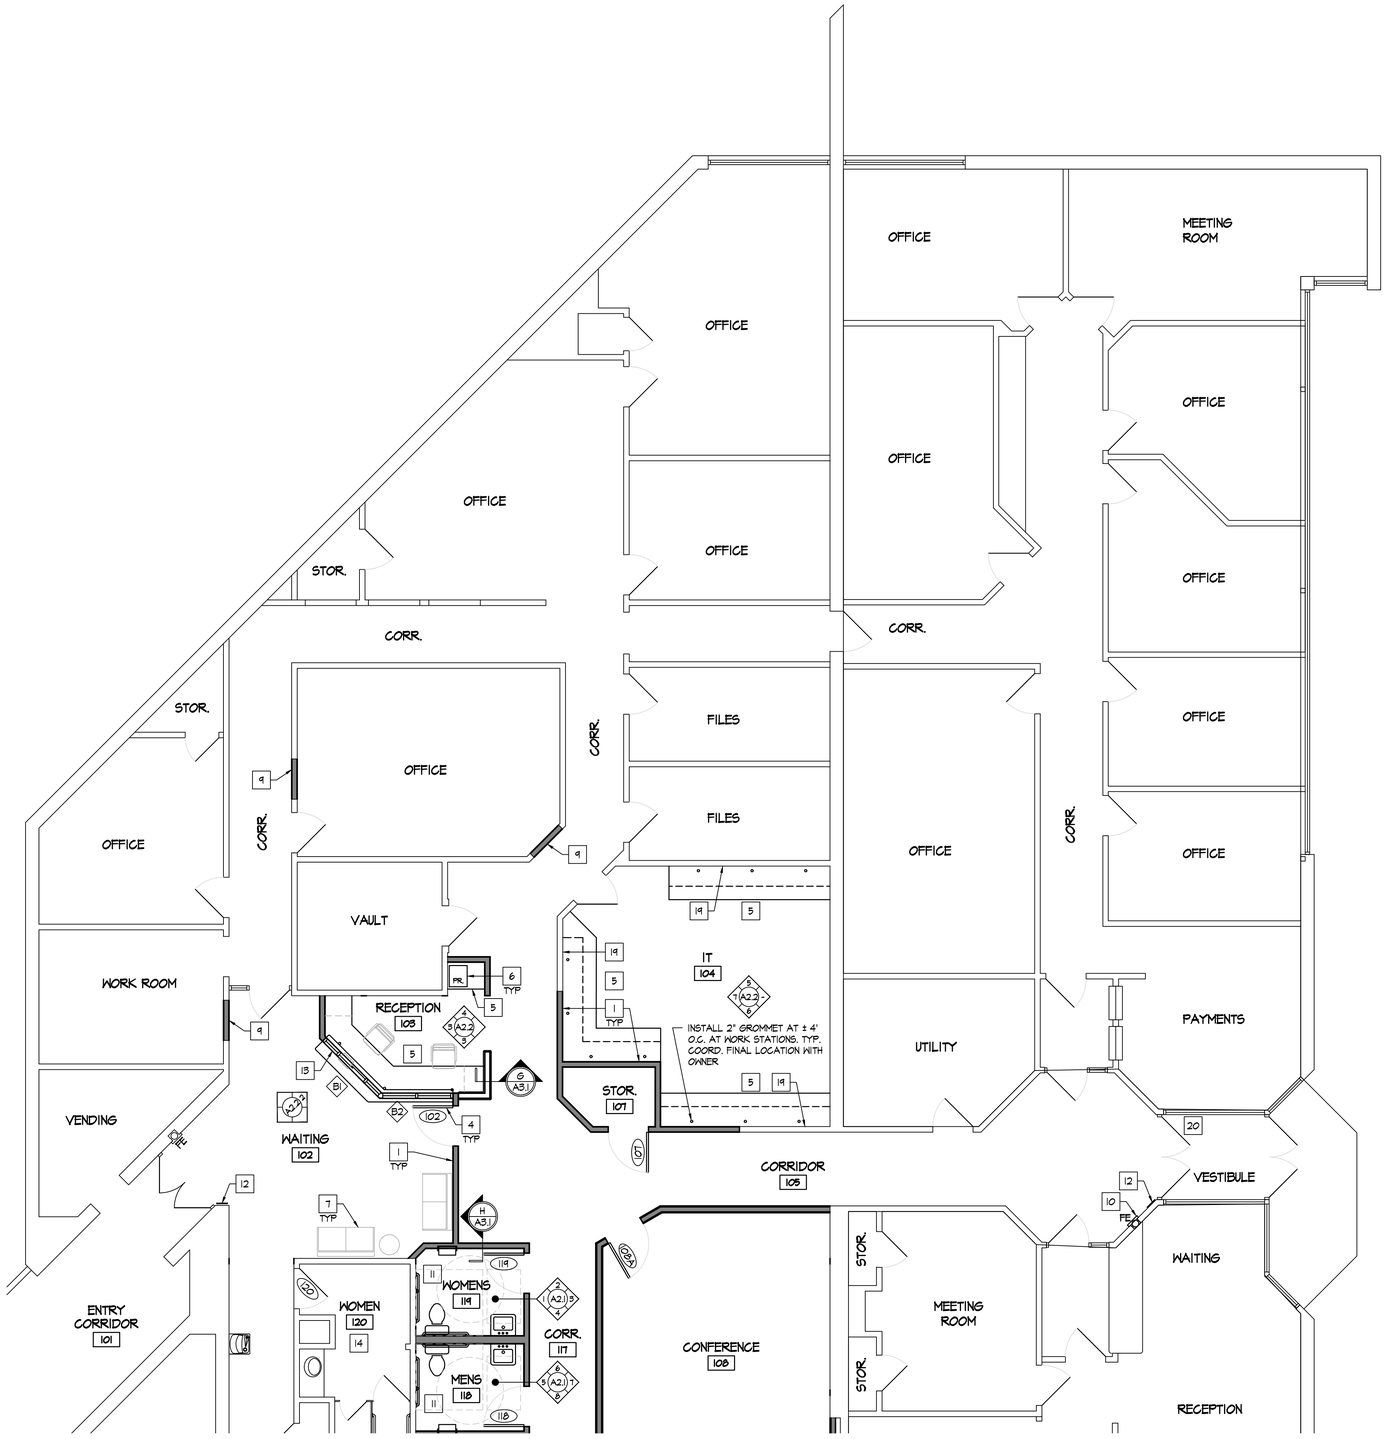

A AREA 'B' PROPOSED FLOOR PLAN

SCALE: 3/16" = 1'-0"

0 2 4 8

NORTH

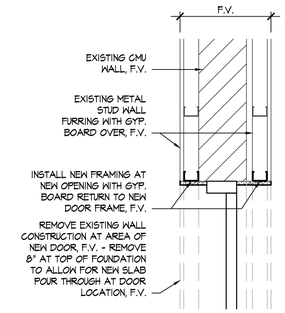

C PLAN DETAIL AT DOOR

SCALE: 1" = 1'-0"

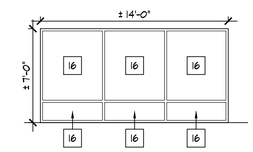

B GLAZING ELEVATION

SCALE: 3/16" = 1'-0"

NEW CONSTRUCTION KEY NOTES

1. NEW METAL STUD FRAME WALL W/ GYPSUM BOARD FINISHES. REFER TO WALL TYPES ON SHEET A1.3.
2. NOT USED
3. NOT USED
4. NEW / SALVAGED DOOR, FRAME, AND HARDWARE, TYP. REFER TO DOOR SCHEDULE.
5. NEW CASEWORK, REFER TO INTERIOR ELEVATIONS / DETAILS, PROVIDE FRT BLOCKING.
6. EQUIPMENT BY OWNER, TYP. (PROVIDE BLOCKING FOR WALL MOUNTED ITEMS, TYP.)
7. FURNISHINGS BY OWNER, TYP.
8. NOT USED
9. INFILL OPENING IN METAL STUD WALL. MATCH IN LIKE KIND / FINISH FLUSH TO PROVIDE A UNIFORM FINISH.
10. INSTALL NEW SEMI RECESSED FIRE EXTINGUISHER CABINET. COORDINATE FINAL LOCATION WITH FIRE DEPARTMENT AS APPLICABLE.
11. NEW PLUMBING FIXTURES AND ACCESSORIES. REFER TO INTERIOR ELEVATIONS. EXTEND SUPPLY/SANITARY PIPING FROM EXISTING. REFER TO P/M/E DRAWINGS
12. INSTALL TACTILE EXIT SIGN ADJACENT TO ALL EGRESS DOORS, TYP.
13. NEW BALLISTIC INTERIOR TRANSACTION WINDOW, INSTALL NEW TRANSACTION COUNTERTOP. REFER TO WINDOW SCHEDULE AND INTERIOR ELEVATIONS.
14. EXISTING TOILET ROOM - PLUMBING FIXTURES & ACCESSORIES TO REMAIN.
15. INFILL OPENING W/ 3 5/8" METAL STUDS AT 16" O.C., 3" SOUND BATT INSULATION, AND [2] LAYERS OF 5/8" NOISE REDUCING GYPSUM BOARD.
16. INSTALL 3M BLACKOUT FILM ON INTERIOR FACE OF EXISTING GLAZING SYSTEM. REFER TO B/A1.2.
17. INSTALL NEW LINTEL AT NEW DOOR OPENING. REFER TO DETAIL A/A3.1. - PROVIDE GYP. BOARD RETURNS AT NEW H.M. DOOR FRAME.
18. PROVIDE 3/4" THICK 4'x4' FRT PLYWOOD BACK BOARD FOR IT EQUIPMENT. COORD. MOUNTING LOCATION WITH OWNER.
19. CUT / PATCH EXIST GYP. BOARD TO ALLOW FOR INSTALL OF FRT BLOCKING FOR WALL MOUNTED SHELVING AT EXISTING WALLS, TYP.
20. CARD READER ACCESS TO BE PROVIDED AT EXISTING DOOR. COORD. WITH OWNER'S SECURITY CONSULTANT [ISM].

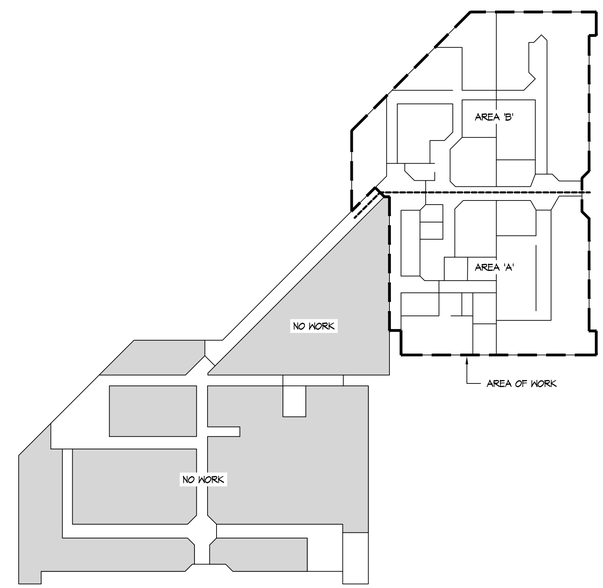

BUILDING KEY PLAN

SCALE: 1" = 30'-0"

0 15 30 60

NORTH

RDA GROUP ARCHITECTS LLC
7945 Washington Woods Drive
Dayton, Ohio 45459
O: 937.610.3440

STATE OF OHIO
JONATHAN ROBERT SCHAAF
14503
REGISTERED ARCHITECT

Jonathan Robert Schaaf #14503
Expiration Date 12/31/2023

This drawing is the architect's instrument of service for use solely with respect to this project. RDA Group Architects is the author of this document and shall retain all copyrights and other reserved rights, unless otherwise agreed upon in writing. ©RDA 2023

Phase 1 Modernization for:

City of Moraine Municipal Building

4200 Dryden Road
Moraine, OH 45439

Print Record

03/06/23 Final Review
03/29/23 Bid / Construction Set

Project Number

2020-149

Date

March 29, 2023

Sheet Title

AREA 'B'
PROPOSED FLOOR PLAN

Sheet Number

A1.2